



2P+E multi-outlet adapters 2 and 3 front outputs

Cat. No(s): 0 494 31/32/33/34
6 945 16/17/18/19



0 494 31/32



6 945 18/19


1. USE

For connection to 2P+E wall outlets.
2 or 3 front outputs.

2. RANGE

Description	French-Belgian standard		German standard	
	White/Light Grey	Black/Dark Grey	White/Light Grey	Black/Dark Grey
2P+E multi-outlet adapters with safety shutter, 2 front outputs with reversed recesses to make it easier to plug in appliances.	0 494 31	0 494 32	6 945 16	6 945 17
2P+E multi-outlet adapters with safety shutter, 3 front outputs with central outlet at a 45° angle and left and right outlets with reversed recesses to make it easier to plug in appliances.	0 494 33	0 494 34	6 945 18	6 945 19

3. DIMENSIONS (mm)

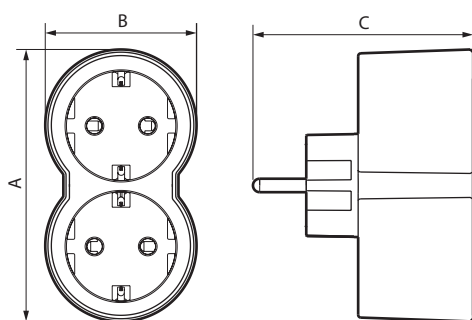

Cat. Nos	A	B	C
0 494 31/32 - 6 945 16/17	97	54	78,5
0 494 33/34 - 6 945 18/19	140	54	77

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact tests: IK 04
Protection against solid bodies and liquids: IP 20

■ 4.2 Material characteristics

Matt Plastic
White RAL 9003/Light Grey RAL 7047
Black RAL 9017/Dark Grey RAL 7024

Halogen-free
UV-resistant

Self-extinguishing:
750°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

■ 4.3 Electrical characteristics

Voltage: 230 V~
Frequency: 50 Hz
Current: 16 A
Power: max. 3680 W

■ 4.4 Climate characteristics

Usage temperature: -5°C to +35°C
Storage temperature: -20°C to +70°C

5. CARE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene..

Caution: Always test before using other special cleaning products.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards
See e. catalogue.